


# PRODUCT SPECIFICATIONS

## GLASSTEX

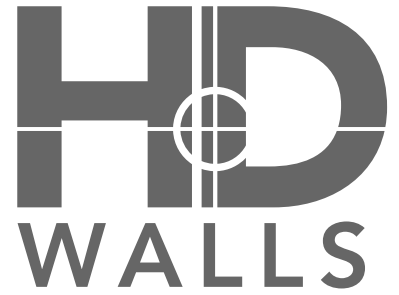

### PHYSICAL PROPERTIES

Film Thickness:

Ice 0.018-0.019 in.

Sandstorm 0.007-0.008 in.

Rice Paper 0.005-0.006 in.

### PRINTING SURFACE

Translucent embossed vinyl

### SHRINK FACTOR

Minimal to imperceptible shrinkage over 5 years

### ADHESIVE PROPERTIES

Acrylic/Solvent based adhesive, permanent. Adhesive has a moderately aggressive tack that allows repositioning.

Can be removed from glass without leaving residue.

Presently there is minimal to imperceptible shrinkage over 5 years.

For best results follow the GlassTex Install Instructions

### CLEANING

May be washed with common, non-abrasive cleaning solutions

\*Visit [www.hdwalls.com/specs](http://www.hdwalls.com/specs) for more information